



**\* DANGER - CAUTION \***


Always Lower The Boat Lift Before Attempting Assembly.

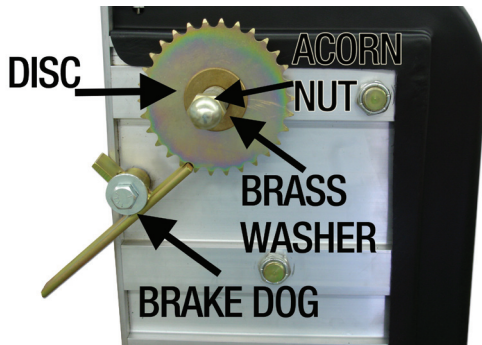



1. Lower the Boat Lift.
2. Remove the Acorn Nut and Wheel. Remove the Brake Dog, Brass Washer and the Disc. You Will Not Use Them Anymore.

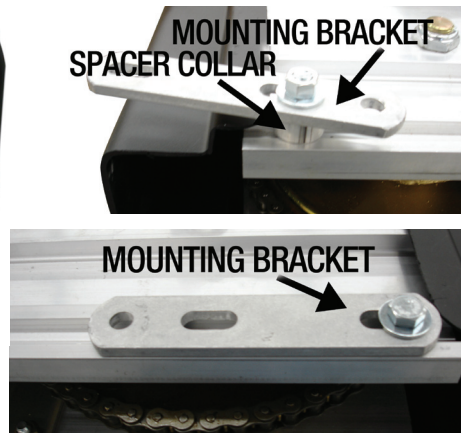

3. This Lift has Two Options. One for Left or Right Mounting. Install the Mounting Bracket.

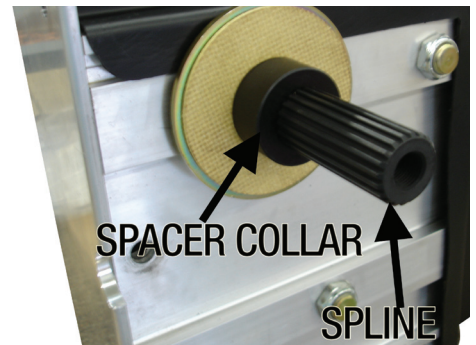

4. Install the Spline and the Spacer Collar.
5. Install the Motor onto the Spline. Install the Black Bolt and Washer onto the Motor and Tighten to Approximately 70 Foot Pounds

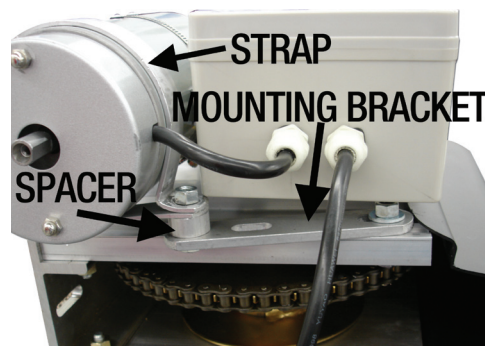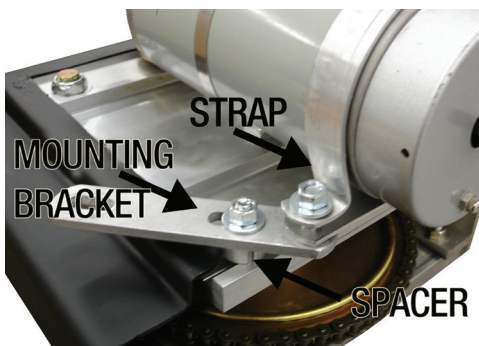


6. Install the Strap Around the Motor and Connect the Strap and Mounting Bracket with the Spacer Provided. Pictures Above Show the Two Different Mounting Options Depending on What you Need.



Plug In and Enjoy!

In Case of a Power Outage This Tool May be Inserted Into a Drill to Raise or Lower Your Lift. First Remove Rubber Cap From the Motor Shaft.

**Recommended Extension Cords up to 150 feet 12/3.**  
 Any question regarding electrical current requirements please call your Authorized Dealer or Lift Tech Marine 1-866-319-8877.

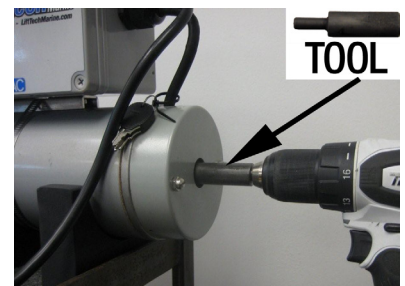

**\* DANGER - CAUTION \***

**All Power Used on Your Dock or Lift Needs to be GFI Protected at the Shoreline.**